

This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

1 Electrical

1.1 Impedance: $50\ \Omega$

1.2 Frequency: DC-26.5GHz

1.3 VSWR: 1.25:1

2 Mechanical&Environmental

2.1 Temperature range $-45^{\circ}\text{C} \sim +85^{\circ}\text{C}$

2.2 Durability(matings) >500

2.3 RoHs Compliant Yes

3 Material&Finish

3.1 Pin contact: Beryllium-Copper, gold plated


3.2 Body: Stainless Steel, Passivated

3.3 Insulators: PEI

4 Interface Standards

4.1 2.4 IEEE STD 287-2007

4.2 3.5 IEC60169

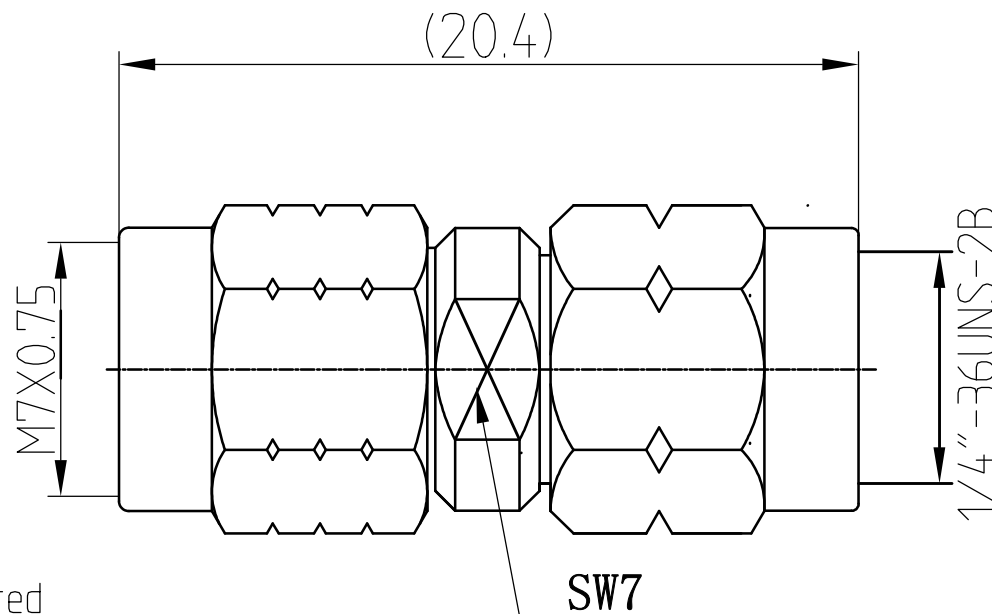

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

TOLERANCES UNLESS OTHERWISE SPECIFIED

X ± 0.50

.X ± 0.20

.XX ± 0.10

ANGLES $\pm 1^{\circ}$

TITLE:

Precision Adapter
2.4 Male to 3.5 Male

PART NO: RM-2.4/3.5-JJG

www.radiomera.ru



DIMENSION IN MILLIMETERS (mm)

SIZE:
A4

SCALE:
N/A

SHEET:
1/1

REV:
A