


This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

1 Electrical Data

- 1.1 Impedance: 50 Ω
- 1.2 Frequency: DC-6GHz
- 1.3 VSWR: 1.30:1

2 Material&Finish

- 2.1 Inner Contact: Brass, gold plated
- 2.2 Outer Contact: brass,gold plated
- 2.3 Insulators: Teflon
- 2.4 Spring contact: Beryllium-copper, gold plated

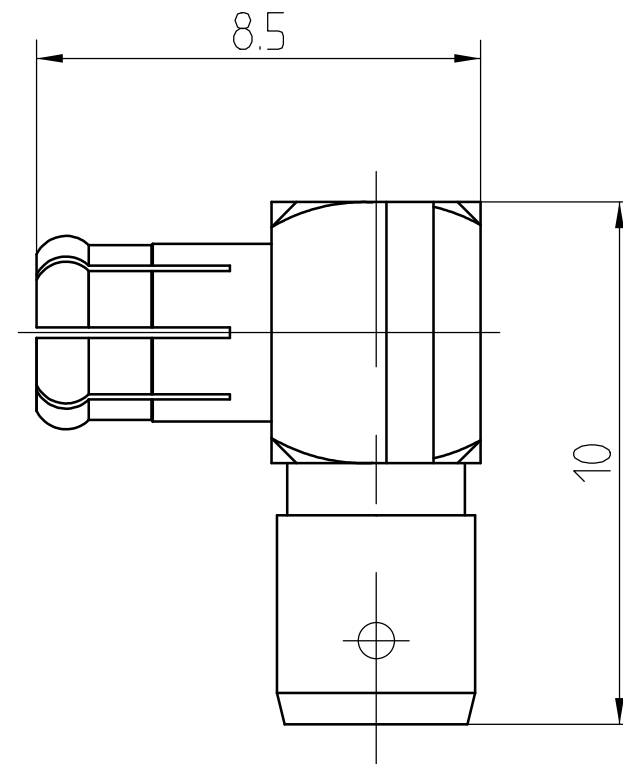

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

TOLERANCES UNLESS OTHERWISE SPECIFIED

X ± 0.50
.X ± 0.20
.XX ± 0.10
ANGLES $\pm 1^\circ$

TITLE:

RF Coaxial Connector

MCX Male R/A Conn. For 086 Cable

PART NO: RM-MCX-JWB2A

www.radiomera.ru



DIMENSION IN MILLIMETERS (mm)

SIZE:
A4

SCALE:
N/A

SHEET:
1/1

REV:
A