


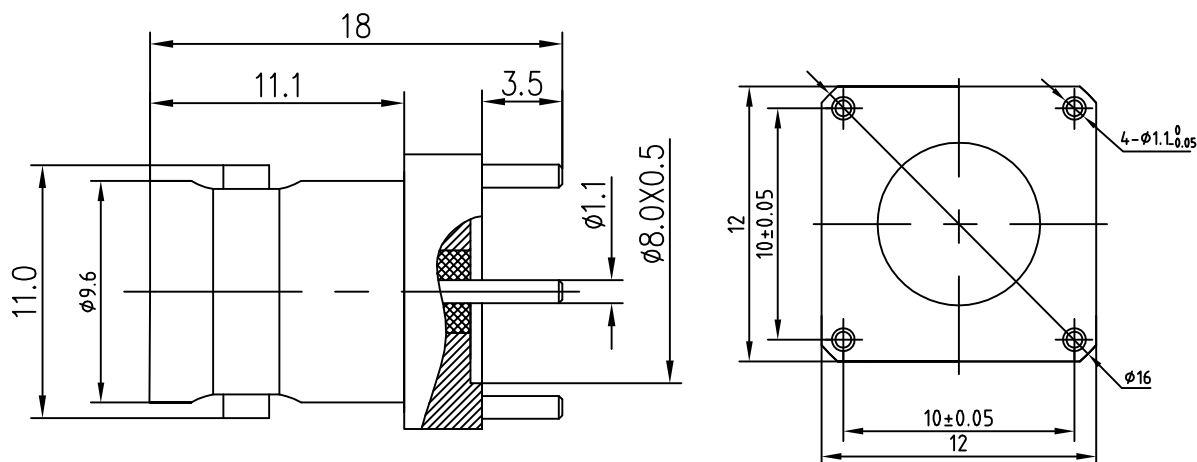

1. Electrical performance

- 1 Characteristic impedance: 50Ω
- 2 Frequency: DC~2GHz
- 3 Center conductor contact resistance: 1.5mΩ max
4. Outer conductor contact resistance: 1mΩ max
5. Dielectric withstand voltage: 1500V
6. Insulation resistance: 5000MΩ min

2. Materials & coating

1. Center conductor: Brass, Gold plated (48 hours gold)
2. Shell: Brass, nickel-plated 3μm
3. Insulation material: PTFE

3. Packaging

1. Packaging: 1pc/bag
2. Outer box: corrugated box, outer packaging content

FIRST ANGLE PROJECTION		SCALE	BNC-KHD RF Coaxial Connector			UNITS	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		
THIRD ANGLE PROJECTION		N/A				mm			
	NAME	DATE				REV	.X±	.20±	1°
DRAWN						V1.0	.XX±	.10	
CHECKED							.XXX±		
APPROVED									