

This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

1 Electrical


- 1.1 Impedence 50 Ω
1.2 Frequency DC~4GHz
1.3 VSWR 1.30: 1

2 Environmental&Mechanical

- 2.1 Temperature range -45℃~125℃
2.2 RoHs Compliant
2.3 Durability >500 cycles

3 Materials&plating

- 3.1 Body: Brass, Gold plated
3.2 Insulator: Teflon
3.3 Contact Pin: Beryllium-copper, Gold plated

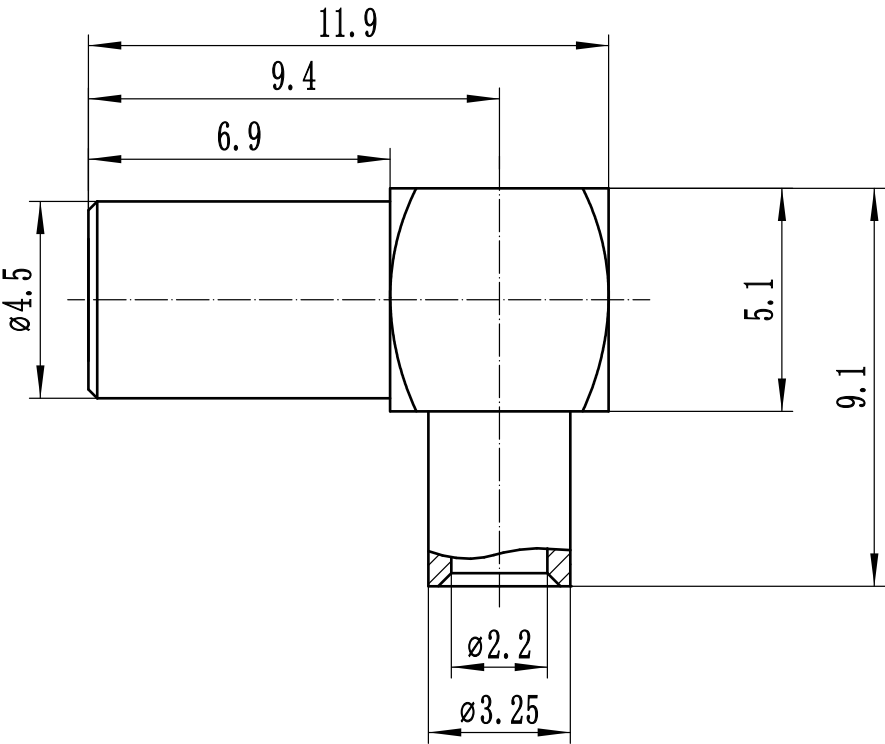

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

TOLERANCES UNLESS OTHERWISE SPECIFIED	
X	±0.50
.X	±0.20
.XX	±0.10
ANGLES	±1°

TITLE		www.radiomera.ru			
RF Coaxial Connector					
SSMB Right-angle plug for RG405 cable		DIMENSION IN MILLIMETERS (mm)			
PART NO: RM-SSMB-KWB2		SIZE: A4	SCALE: 6:1	SHEET: 1/1	REV: VA