


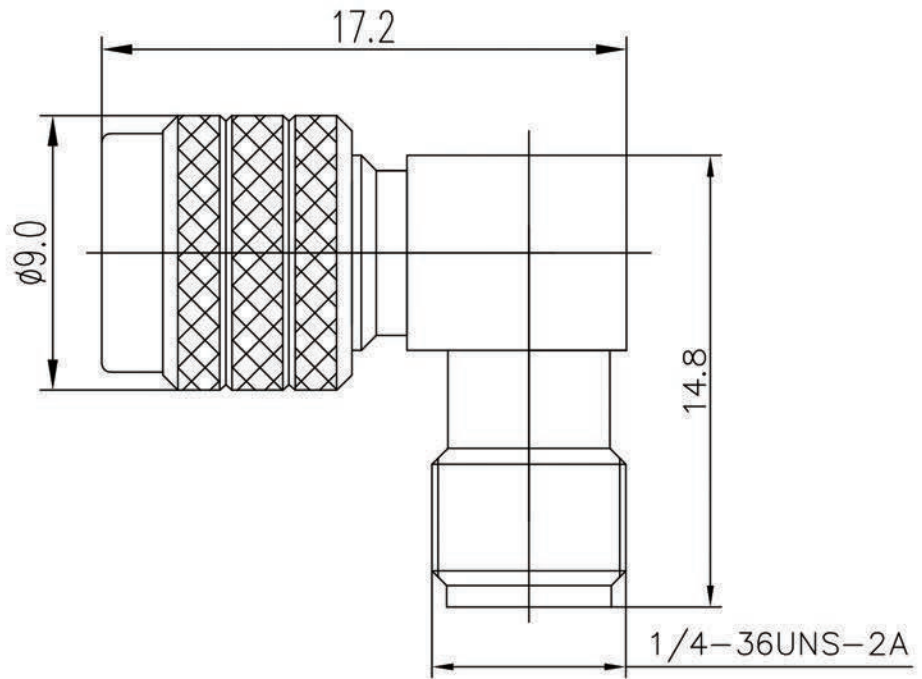

Electrical

1. Impedance: 50Ω
2. Frequency: 0~6GHz
3. Contact Resistance
Center Conductor $\leq 3.0m\Omega$
Out Conductor: $\leq 2.0m\Omega$
4. Dielectric withstanding voltage: $\geq 1000V$
5. Insulation resistance: $\geq 5000M\Omega$

Material&Finish

1. Inner Conductor: Beryllium Copper, gold plated
2. Outer conductor: Brass, gold plated
3. Insulators: Teflon

FIRST ANGLE PROJECTION		SCALE	QSMA-JWK	UNITS	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE: FRACTIONS DECIMALS ANGLES .X± .2± 1° .XX± .10 .XXX±
THIRD ANGLE PROJECTION		N/A		mm	
	NAME	DATE	RF Coaxial Connector	REV	
				V1.0	
DRAWN					
CHECKED					
APPROVED					