

This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

1 Electrical



1.1 Impedence	50Ω
1.2 Frequency	0~3GHz
1.2 Dielectric withstanding voltage	4000V(volts RMS)
1.3 Center contact resistance	≤ 0.4mΩ
1.4 Outer contact resistance	≤ 1.5mΩ
1.5 Insulation resistance:	≥10000MΩ
1.6 VSWR	1.15:1

2 Environmental&Mechanical

2.1 Temperature range	-40℃~85℃
2.2 RoHs Compliant	
2.3 Durability	>500 cycles

3 Materials&plating

3.1 Body:	Brass, SUCO-Plating
3.2 Insulator:	Teflon
3.3 Contact Pin:	Phosphor Bronze, Silver plating
3.4 Gasket:	Silicon Rubber

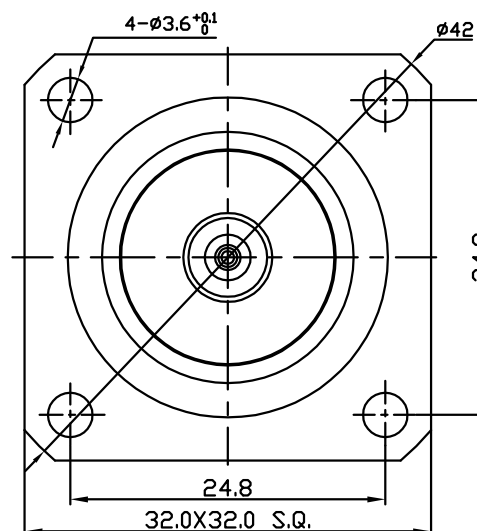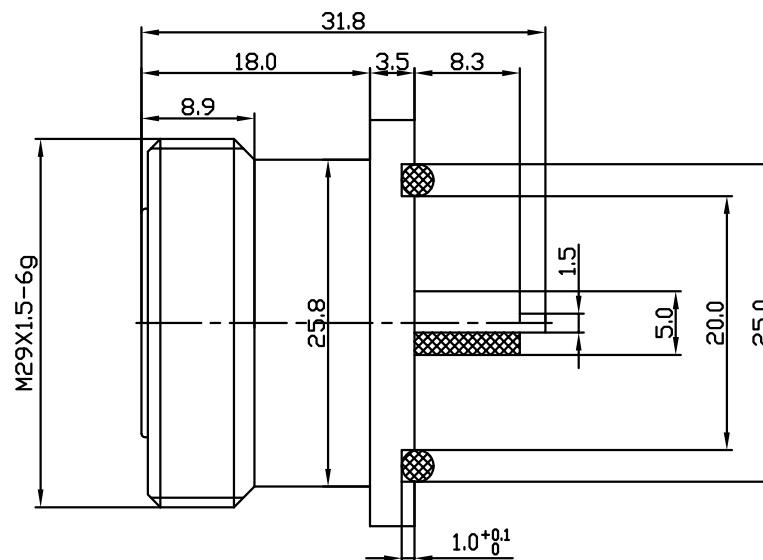

Notes:

- 1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

TOLERANCES UNLESS OTHERWISE SPECIFIED

X	±0.50
.X	±0.20
.XX	±0.10
ANGLES	±1°

TITLE:
RF Coaxial Connector
L29 Female Flange conn.Terminal

PART NO: RM-L29-KFD113

www.radiomera.ru



DIMENSION IN MILLIMETERS (mm)

SIZE:
A4

SCALE:
N/A

SHEET:
1/1

REV:
A