


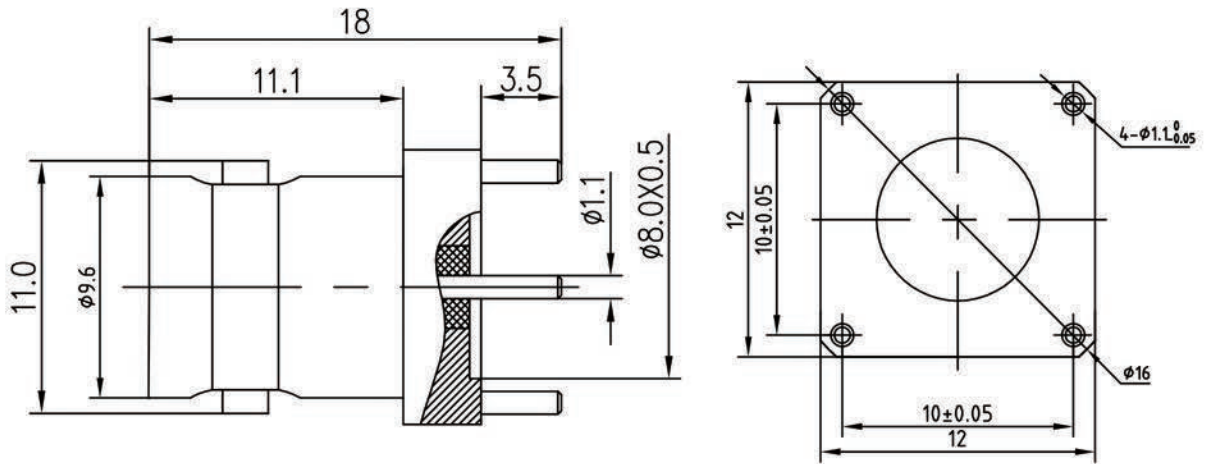

1. Electrical performance

- | | |
|---|------------|
| 1.1. Characteristic impedance: | 50Ω |
| 1.2. Frequency: | DC~2GHz |
| 1.3. Center conductor contact resistance: | 1.5 mΩ max |
| 1.4. Outer conductor contact resistance: | 1mΩ max |
| 1.5. Dielectric withstand voltage: | 1500V |
| 1.6. Insulation resistance: | 5000MΩ min |

2. Materials&Plating

- | | |
|-------------------------|--------------------------|
| 1. Center conductor: | Brass, Gold plated |
| 2. Shell: | Brass, Nickel plated 3μm |
| 3. Insulation material: | PTFE |

3. Packaging

- | | |
|---------------|---|
| 1. Packaging: | 1pc/bag |
| 2. Outer box: | corrugated box, outer packaging content |

FIRST ANGLE PROJECTION		SCALE	BNC-KHD	UNITS	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE: FRACTIONS DECIMALS ANGLES .X± .20± 1° .XX± .10 .XXX±	
THIRD ANGLE PROJECTION		N/A		mm		
	NAME	DATE		REV		
DRAWN				V1.0		
CHECKED			www.radiomera.ru			
APPROVED						