


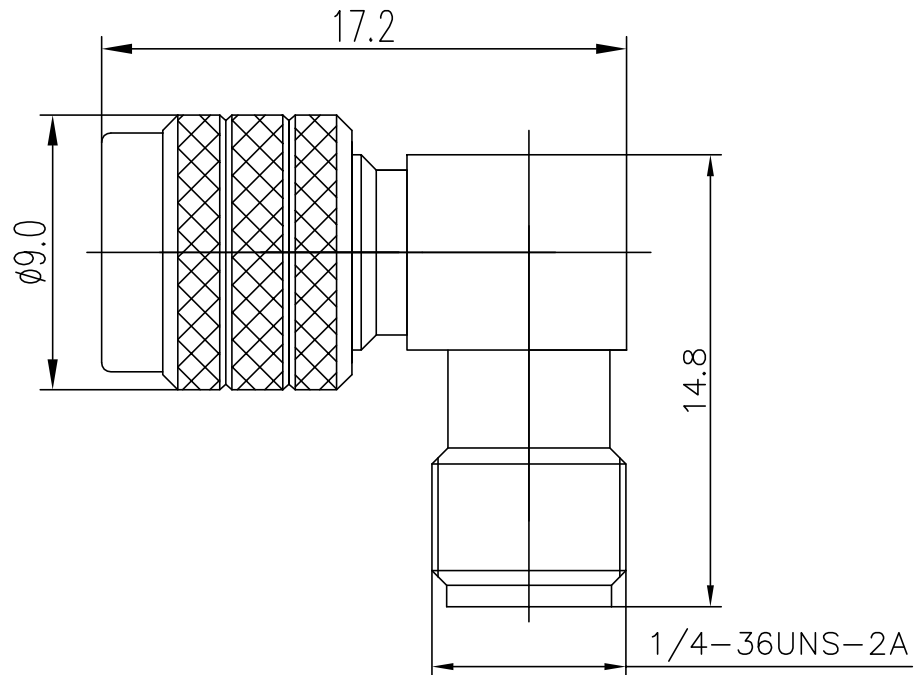

Electrical

1. Impedance: 50Ω
2. Frequency: 0~6GHz
3. Contact Resistance
Center Conductor $\leq 3m\Omega$
Out Conductor: $\leq 2m\Omega$
4. Dielectric withstanding voltage: $\geq 1000V$
5. Insulation resistance: $\geq 5000M\Omega$

Material&Finish

1. Inner Conductor: Beryllium Copper, gold plated
2. Outer conductor: Brass, gold plated
3. Insulators: Teflon

FIRST ANGLE PROJECTION		SCALE	Q SMA-JWK	UNITS	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE:
THIRD ANGLE PROJECTION		N/A		mm	
	NAME	DATE	RF Coaxial Connector	REV	FRACTIONS DECIMALS ANGLES
				V1.0	.X± .2± 1° .XX± .10 .XXX±
DRAWN			www.radiomera.ru		
CHECKED					
APPROVED					